


Project Name:			
Location:		Approval:	
Engineer:		Date:	
Submitted to:		Construction:	
Submitted by:		Unit #:	
Reference:		Drawing #:	
Telefolice.		Drawing #.	
Performance			
Indoor Unit Model No:	FHQ42MVJU	Indoor Unit Type:	Ceiling Suspended
Outdoor Unit Model No:	RZQ42PVJU9	Condensing Unit Type:	SkyAir Heat Pump
Rated Cooling Capacity (Btu/hr):	40500		Indoor: 80°F DB/67°F WB
Sensible Capacity (Btu/hr):	27900	Rated Cooling	Outdoor: 95°F DB/75°F WB
Max/Min Cooling Capacity (Btu/hr / kW): ata		Conditions	
Cooling Input Power (kW):	4.465		Indoor: 70°F DB/60°F WB
SEER:	13.8	Rated Heating	Outdoor: 47°F DB/43°F WB
Rated Heating Capacity (Btu/hr):	39500	Conditions	
Max/Min Heating Capacity (Btu/hr / kW): ata		Rated Piping Length(ft)	25
Heating Input Power (kW):	4.465	Rated Height Separation(ft)	0
Heating COP (Btu/hr / Btu/hr):	2.69		
HSPF:	7.7		
TIOL 1.	7.1	_	_
Indoor Unit Details			
	208-230/60/1ph	Airflow Rate (CFM wet coil)	850//700
	L1, L2, Ground	Moisture Removal (pt/h):	
Min Circuit Amps MCA (A):	1.4	Gas Pipe Connection (inch):	5/8
Max Overcurrent Amps MFA (A):	15	Liquid Pipe Connection (inch):	
	x62-5/8x26-3/4	Condensate Connection (inch	
Panel (HxWxD):	N/A	Sound Pressure Level (dBA):	47
Net Weight (lbs):	90	Sound Power Level (dBA):	
Weight with Panel (lbs):		Static Pressure Rated/Max (in	(Wg) 0 / 0/0
			3/
Condensing Unit Details			
Power Supply (V/Hz/Ph):	208-230/60/1ph	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	25 - 100
Min. Circuit Amps MCA (A):	27	Airflow Rate (CFM):	3740
Max. Overcurrent Amps MFA (A):	30	Gas Pipe Connection (inch):	5/8
Max. Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA (A):	19.6	Sound Pressure Level (dBA):	58
	35-7/16x12-5/8	Sound Power Level (dBA):	
Net Weight (lbs):	283		
System Details  Patrice and Transport	D 4404	Max Dina Larath (Vantia 16)	404.0
Refrigerant Type:	R-410A	Max. Pipe Length (Vertical ft):	
Holding Refrigerant Charge (lbs):	8.8	Cooling Operation Range (%)	
Additional Charge (oz/ft):	0.036lbs/ft	Cooling Range w/Baffle (°F):	0 - 115
Pre-charge Piping (Length ft):		Heating Operation Range (°F)	
Max. Pipe Length (Total ft):	230 ft	Heating Range w/Baffle (°F):	0 - 77



Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

### **Dimensional Drawing - Indoor Unit**

FHQ42MVJU

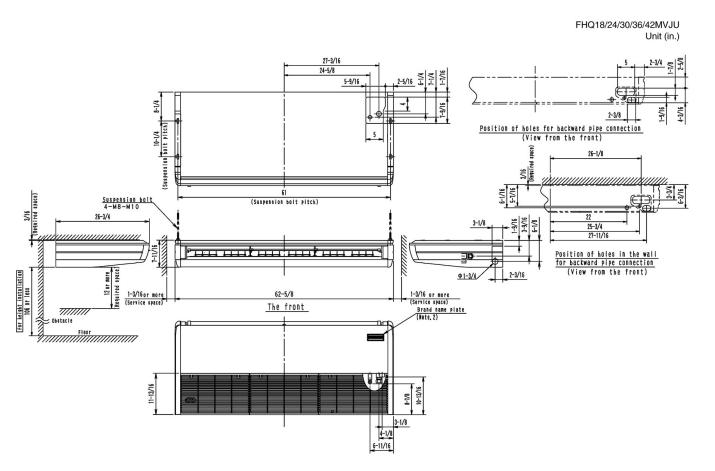




Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

## **Dimensional Drawing - Condensing Unit**

RZQ42PVJU9

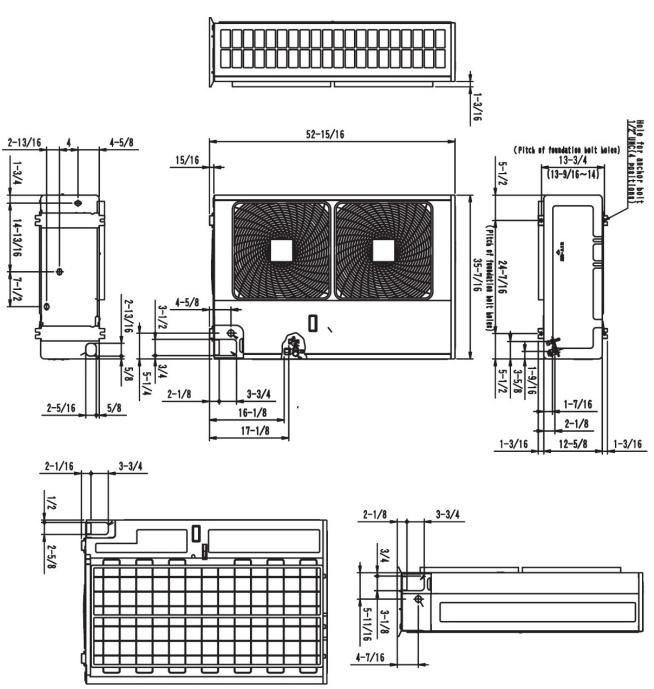




Project Name:		
_ocation:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	



# FHQ42MVJU Std U.S. Warranty: 7yrs Compressor, 5yrs Parts

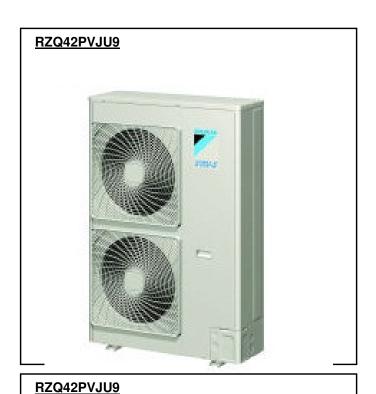

# Std U.S. Warranty: 7yrs Compressor, 5yrs Parts